


Topstore® – TC® Semi-Open Fronted Containers

Technical Details

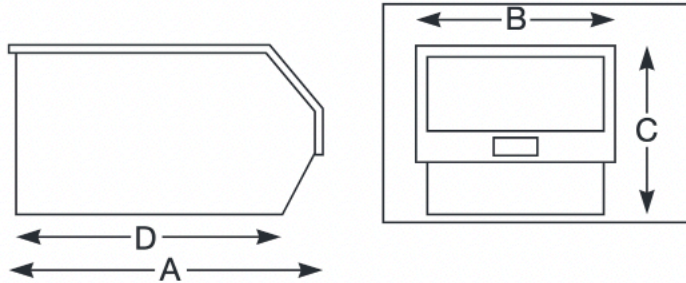

Container Stacking Loads:

Please note that when stacking containers, the entire stack load is dispersed onto the base container therefore neither the individual load or the total load of the stacked containers (up to the max. stack height) should exceed the max. stack load.

Eg. The diagram below shows TC5 containers stacked to their max. of 4 high. As the max. stack load for TC5 is 45Kg, if containers 1, 2 & 3 are equally loaded they can each carry 15Kg. If they were stacked 3 high and equally loaded each container could carry 22.5Kg, or 2 high 45Kg.

	TC1	TC2	TC3	TC4	TC5	TC6	TC7
Overall Length mm (A)	90	165	240	350	350	375	520
Overall Width mm (B)	100	100	150	205	205	420	310
Overall Height mm (C)	50	75	132	132	182	182	200
Overall Base Length mm (D)	64	143	200	300	300	310	450
Internal Length mm (A)	80	154	223	330	330	350	470
Internal Width mm (B)	88	88	128	179	177	378	270
Internal Height mm (C)	42	63	120	117	167	164	188
Internal Base Length mm (D)	65	131	188	287	287	295	435
Volume (Litres)	0.46	1.27	4.6	9.1	12.8	28.3	31.4
Maximum Container stack height	7	5	4	6	4	8	6
Maximum stack load capacity (kg) See details opposite	12	12	30	36	45	60	42
Max load capacity on louvred panel (kg) (based upon louvred panel in this publication)	8	8	20	24	30	40	28
Louvre Calculator	Please see page 13 for container / louvre panel configuration						

For all bin capacities see the chart opposite

