


Double Swing Gate

6m, 8m, 10m, 12m and 14m

Galvanised and Colour

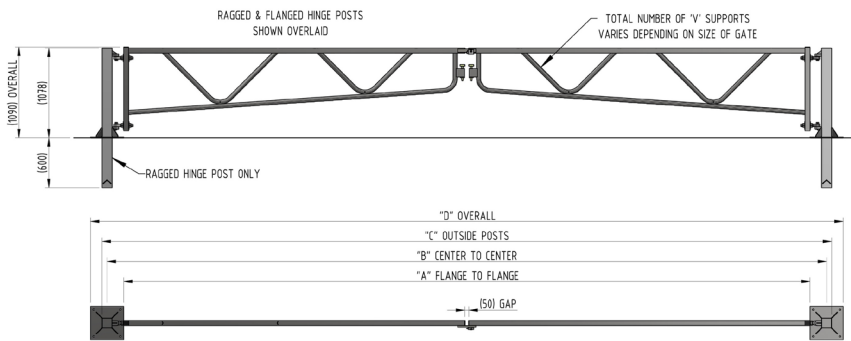

The Double Swing Gate is a manually operated, ideal for securing entrances to large industrial and commercial sites. Gates can be locked in both the open and closed positions. Additional catch posts and padlocks are available separately if required.

Robust and reliable, with several safety features incorporated into the design as standard; including, a short leading edge beam, low bottom edge and a self-latching catch post. All these combined reduce the chances of the gate swinging open unexpectedly.

Manufactured from galvanised mild steel, the gate is coated red as standard (other colours are available upon request; please state BS/RAL numbers at time of order) and the AUTOPA Double Swing Gate is available ragged or flanged.



Description

- 6m Galvanised & Colour - Bolt Down
- 6m Galvanised & Colour - Concrete In
- 8m Galvanised & Colour - Bolt Down
- 8m Galvanised & Colour - Concrete In
- 10m Galvanised & Colour - Bolt Down
- 10m Galvanised & Colour - Concrete In
- 12m Galvanised & Colour - Bolt Down
- 12m Galvanised & Colour - Concrete In
- 14m Galvanised & Colour - Bolt Down
- 14m Galvanised & Colour - Concrete In

Product details

- Main Body: 120mm x 120mm square tube
- Concrete in 600mm (below ground)
- Main Gate Arm: 60mm x 60mm square tube

Installation & use

Bolt down Swing Gates require bolting down to a suitable concrete surface (no less than 600mm³) by means of four M16 bolts per leg.

Concrete in Swing Gates require an excavated hole (no less than 600mm³) for installation.

It is recommended that suitable signs are installed to ensure vehicles are aware of the obstruction.

This product is guaranteed for 12 months (if installed and used correctly).

