


Removable Bollard 900mm Above Ground 60mm - 193mm Diameter Galvanised





The Removable Bollard offers an effective, simple and robust way to protect premises and vehicles. Removable Bollards are particularly suitable for locations where occasional access is required, the simple tab and padlock system provides an easy to operate solution for locking the bollard in place. The Removable Bollard is 900mm above ground and is available in a range of outside tube diameter sizes from 90mm through to 193mm. Padlock to secure is available at an extra cost.

The Removable Bollard 900 is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways and can be used in conjunction with fixed bollards as part of a security system for all types of premises.

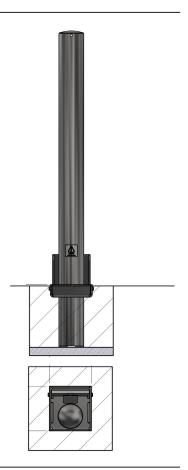

Part Number	<u>Description</u>	<u>Lift Weight (kg)</u>	Weight (kg)
138 121 115	60mm Galvanised	5kg	9kg
138 121 250	76mm Galvanised	6kg	10kg
138 121 291	90mm Galvanised	7kg	11kg
138 121 309	101mm Galvanised	9kg	17kg
138 121 425	114mm Galvanised	10kg	18kg
138 121 525	127mm Galvanised	11kg	19kg
138 121 621	139mm Galvanised	20 kg	28kg
138 121 665	152mm Galvanised	13kg	21kg
138 121 699	168mm Galvanised	24kg	36kg
138 121 795	193mm Galvanised	28kg	41kg

Product details

- 900mm (height above ground)
- 3mm wall thickness 60mm-127mm and 152mm
- 5mm wall thickness 139mm, 168mm, and 193mm
- Socket 220mm (below ground) 60mm 90mm diameter
- Socket 300mm (below ground) 101mm 193mm diameter
- · Price excludes padlock to secure

Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

