




One Way Flow Plate Galvanised Ragged

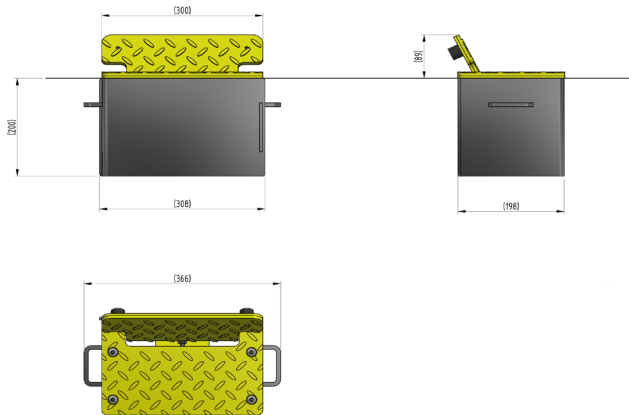

The AUTOPA One Way Flow Plate controls traffic flow to one direction only and is designed to work in groups to provide full road width coverage. As a vehicle passes over the plate, the flap is pushed down, allowing the vehicle to pass, the rubber buffer on the reverse of the flap ensures noise is kept to a minimum. Once the vehicle has passed the flap returns to its upright position.

Manufactured from heavy duty steel which is then galvanised to ensure longevity and coated yellow to maximise visibility.

The AUTOPA One Way Flow Plate is not recommended for HGV use.

Can be used in conjunction with AUTOPA Speed Ramp to achieve the required 5mph drive over speed. Good street illumination should be used to ensure adequate visibility.



<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 106 400	One Way Flow Plate	19kg

Product details

- 200mm x 300mm x 290mm (width x length x height)
- Galvanised Steel Plate
- Concrete in 200mm (below ground)
- Recommended minimum vehicle clearance - 150mm

Installation & use

One Way Flow Plates require an excavated hole (no less than 500mm x 500mm x 250mm (l x w x d) for installation.

Flow Plates should be positioned such that vehicles can only approach them head on.

Suitable road signs should be installed advising drivers to use of One Way Flow Plates and to slow to 5mph.

This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

