
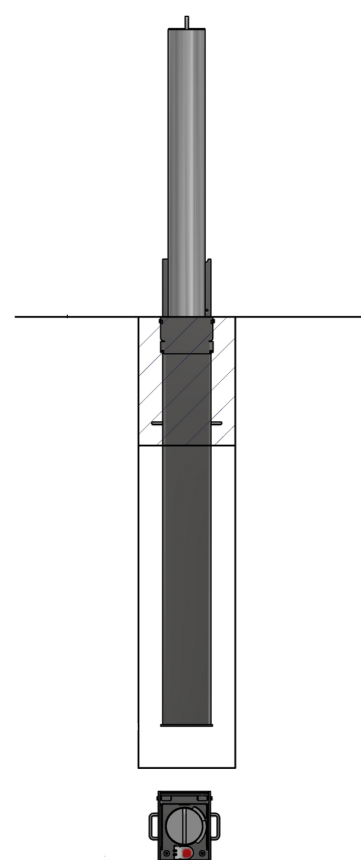


# RetractaPost-900mm

## Galvanised or Galvanised & Colour

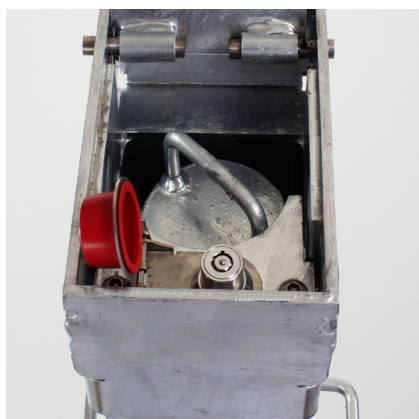

The RetractaPost offers a highly effective and robust way to protect premises and vehicles. The RetractaPost-GL is raised and lowered vertically and is 900mm tall when raised. When lowered the post is fully below ground and covered using the integral lid. The post is lockable in the raised position by rotating the post 45° and then pressing the high-security push button 7-pin security lock. The post is unlocked using the supplied key, rotated and then lowered.

The RetractaPost-GL is ideal for protecting vehicle forecourts, commercial premises, car parks and domestic driveways.

Tested and approved by Sold Secure.

This product has achieved Secure by Design status.

### Description

101mm Galvanised
101mm Galvanised & Black
101mm Galvanised & Yellow
101mm Galvanised & Colour
114mm Galvanised
114mm Galvanised & Black
114mm Galvanised & Yellow
114mm Galvanised & Colour

### Lift Weight (kg)

9kg
9kg
9kg
9kg
12kg
12kg
12kg
12kg

### Weight (kg)

33kg
33kg
33kg
33kg
36kg
36kg
36kg
36kg



### Secured by Design



### Product details

- 900mm (above ground when raised)
- Socket - 1250mm (below ground)
- 3mm wall thickness
- Red/white chevron tape available extra
- Other colours available on request

### Installation & use

Bolt down to a suitable concrete surface.  
Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.  
Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.  
Products are guaranteed for 12 months (if installed and used correctly).

